





# PAC INTERNATIONAL, INC.

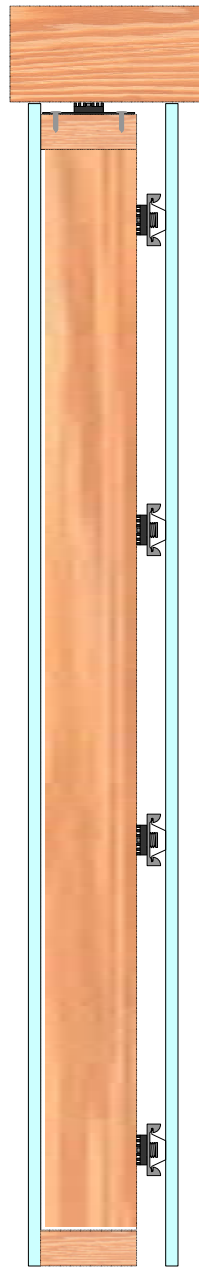

## RSIC-U-HD/DD SOUND ISOLATION CLIP

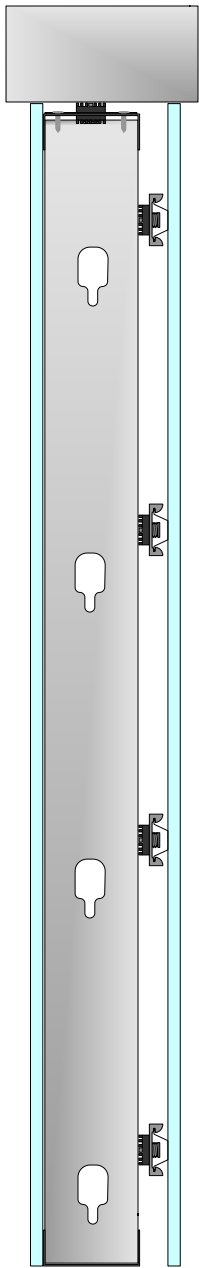

Wood
Steel
Metal deck

Concrete
Condo
Commercial

Apartment
Retail
Conference Rooms

Recording Studio
Home Theater
Commercial theater

## RSIC--HD/DUD



The **RSIC-U-HD/DD** is designed for use with any wood, steel or concrete application where noise control is required. This includes, wood framed, and steel framed wall systems that need Vibration and Noise Isolation from the structure above. The RSIC-U-HD/DD Clip decouples the framed structure from the joist at the wall-ceiling intersection stopping the transfer of noise. The RSIC-U-HD/DD clip has an Acoustical design load rating of 144 lbs per isolator. The RSIC-U-HD/DD systems have several UL fire resistive design assemblies with steel studs from ranging one hour to two hours. The UL assemblies can be viewed on our site at [http://pac-intl.com/fire\\_ratings\\_list.html](http://pac-intl.com/fire_ratings_list.html), and on UL.com

### RSIC-U-HD/DD specifications:

Acoustical design load:	144 Lbs
Total deflection	3 mm
Double deflection	Yes (1.5 mm)
Made with Recycled content	Yes
Low VOC treated	Yes
Adjustable	No
Cavity min	1/2"
Cavity Max	1/2"
Adjustment limit	N/A
Use on Ceilings	No
Use on walls	Yes
New Construction	Yes
Retro Fit	Yes

**RSIC is the Low Cost, High Performance, Noise control Solution**